


IQ Quattro ><

24" 36" 44"

**THE INDUSTRY-
LEADING SCANNER
FOR LARGE FORMAT
TECHNICAL
DRAWINGS**

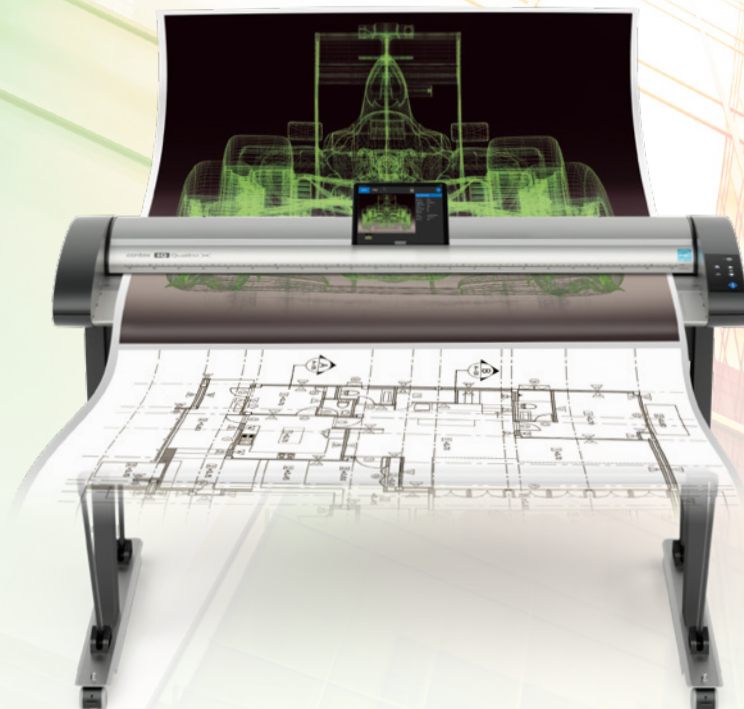

SCAN FASTER AND SMARTER WITH MORE PRECISION IN EVERY PIXEL



FADGI compliance. Together with Nextimage 7, IQ Quattro X exceeds FADGI 3-star compliance, and is a must have for every high-production environment.

Faster: IQ Quattro X is the 5th generation of Context CIS scanners, with enhanced speed and 3 times faster data transfer, the scanner is the essence of productivity.

Smarter: The Nextimage Remote app offers you an alternative way of working. The app saves valuable operator time by bringing all main functions essential for basic scanning and copying in front of the operator directly on the scanner.

Better: Context Live Alignment is an IQ Quattro X technology designed to improve image alignment across sensors ensuring precise and sharp alignment all the time, no matter the speed.

Improved technology: Context USB 3.0 implementation with xDTR3 is blisteringly fast and you won't have to worry about shoe shining or rescanning to get the width right.

Powered by X-Rite®

The ICC color profile in Nextimage 7 is powered by X-Rite®.

Image quality

The 48-bit CIS technology captures every detail from your document, then passes the best 24-bits through to the file at up to 1200 dpi optical resolution.

Fastest CIS scanner

The IQ Quattro X scanners produce a scan speed of up to 17.8 inches per second in RGB color and 200 dpi.

Green technology

Energy Star® version 3.0 compliant using only 0.5W in standby mode.

High productivity

Enhanced speed and data transfer rates makes the IQ Quattro X the essence of productivity.

OUTSTANDING IMAGE QUALITY AND PRODUCTIVITY


SEE MORE: context.com/iqquattroX

 **context®**
WHEN IMAGING MATTERS

	IQ QUATTRO X 2450	IQ QUATTRO X 2490	IQ QUATTRO X 3650	IQ QUATTRO X 3690	IQ QUATTRO X 4450	IQ QUATTRO X 4490
Optimized for	Precision (frequent use)					
Maximum scan width	24 inch (610 mm)		36 inch (914 mm)		44 inch (1118 mm)	
Maximum media width	26.6 inch (676 mm)		38 inch (965 mm)		47 inch (1194 mm)	
Scanning speed (inch/sec.) 36-inch wide document						
200 dpi RGB color	8.9	17.8	8.9	17.8	8.9	17.8
Upgradeable	Yes, to 17.8		Yes, to 17.8		Yes, to 17.8	
200 dpi grayscale/monochrome	17.8		17.8		17.8	
Productivity¹ (documents/hour) Batch scanning for 60 minutes (200 dpi). Includes paper load and eject time. Measured in completed scans						
	Arch D-size, portrait		Arch E-size, portrait			
RGB color	523		523		523	
Monochrome	856	856	856	856	856	856
Specifications						
Maximum media thickness	0.08 in (2 mm) flexible documents					
Optical resolution	1200 dpi					
Maximum resolution	9600 dpi (interpolated)					
Total number of pixels	32400 pixels		54000 pixels		64800 pixels	
Context key CIS technologies	CleanScan², SIGMA³, CFR⁴					
Document justification	Flexible center load, due to autofocus					
Accuracy	0.1% +/- 1 pixel					
Data capture	48-bit color, 16-bit grayscale					
Data output	Up to 48-bit color, 16-bit grayscale (when operated with Nextimage software)					
Color spaces	sRGB, Adobe RGB, Device RGB					
USB connection	USB 3.0 with xDTR3					
Ethernet connection	Gigabit with xDTR2.5					
Energy Star®	Yes, version 3.0					
Included software	Nextimage 7 trial (incl. TWAIN driver, excl. licence)					
Optional software	Nextimage Scan & Archive, Nextimage Repro, Nextimage Remote tablet app⁵ (free download for iOS and Android)					
File formats⁵	TIF, JPG, PDF, PDF/A, DWF, CALS, BMP, JPEG-2000(JP2), JPEG2000 Extended (JPX), TIF-G3, TIF-G4 and others					
Printer support⁵	HP, Canon, Epson and Océ printers. See context.com/nextimage-supported-printers for full list					
Operating systems	Windows 11 64-bit, Windows 10 64-bit, Windows Server 2025 Standard Edition					
Power consumption (ready/sleep/scan)	18W max. / <1W / 37W (built-in power supply)					
Power supply	100 V / 230 V / 240 V, 60/50 Hz					
Weight	33.7 lbs. (15.3 kg)		48.3 lbs (21.9 kg)		54 lbs (24.5 kg)	
Dimensions (WxDxH)	32.4x19.3x6.3 in (823x489x161 mm)		45.7x19.3x6.3 in (1160x489x161 mm)		53.1x19.3x6.3 in (1349x489x161 mm)	
Certifications/compliance	CE, cUL/UL, CCC, EAC, UKR, BIS, FCC Class A, ICES, EMC, VCCI, KC, EuP, WEEE, RoHS, REACH and ENERGY STAR® certified					
Low adjustable scanner stand (optional)	5 settings: 31.1/32.1/33.1/34.1/35.1 in (791/816/841/866/891 mm)				2 settings: 30.2/32.1 in (766/816 mm)	
High adjustable scanner stand (optional)	9 settings: 40.6 to 48.5 inches in steps of 1 inch (1031 to 1231 mm in steps of 25 mm)					
ScanStation Pro compatibility					Yes	
Country of origin	Designed and engineered in Denmark, Europe. Manufactured in China.					
TAA compliant scanner	TAA compliant scanners are for US customers only and are assembled in Denmark					


- Context recommends Intel Core i5, AMD Ryzen 5 5500, or better 64-bit processors, 16 GB RAM and SSD SATA drive, min. USB 3.0 or Gigabit Ethernet. Productivity performed using Nextimage software, Intel® Core™ Ultra 7 265KF Processor, 32GB DDR5 RAM, 2TB SSD, SuperSpeed USB 3.0, Windows 11 64-bit.
 - Context CleanScan is a Context innovation comprising dual-sided and dual-diffused LEDs in a single custom-built CIS module
 - Context Signal Intensity Matching (SIGMA) is a Context patent that reduces the effects of uneven heat build-up in CIS sensors during scanning
 - Context Color Fringe Removal (CFR) is a Context patent that sharpens images by filtering out the fringes produced by strobing CIS devices
 - Nextimage scanning software required
- Tablet not included. All trademarks remain the property of their respective holders, and are used only to directly describe the product being provided. Their use does not indicate a relationship between Context and the trademark holders.

IQ Quattro X: High data transfer – superior image quality



Context CleanScan CIS

The IQ Quattro Scanners are equipped with Context CleanScan CIS modules which facilitate optical image quality with dual-sided LED lighting. This eliminates creases and folds in originals normally a challenge for CIS scanners, and thus provides clear, crisp scans every time.



Color fringe removal (CFR) technology

Color Fringe Removal (CFR) is an advanced Context patented filtering technology designed to remove the fringes inherent in CIS strobing scanning devices.

HP ready **Océ** ready **EPSON** ready **Canon** ready

Context solutions are compatible with all leading large-format printers. See the full list at context.com/nextimage-supported-printers



context.com/iqquattroX

Context HQ & EMEA

Global Scanning Denmark A/S
Copenhagen, Denmark
Phone: +45 4814 1122
info@context.com

Context Americas

Global Scanning Americas Inc.
Chantilly, VA, 20151, USA
Phone: +1 (877) 226 6839
salesamericas@context.com

Context Japan & Asia

Global Scanning Japan A/S
Yokohama, Japan
Phone: +81 45 548 8547
apac@context.com

